





PVC TUBE : WHITE

Ø ID (MM)	PART NO.	PVC MARKING TUBE (WHITE)	RECOMMENDED CABLE SIZE (MM ²)
2.0	MS2020	2.0 MM. X 200 M	0.24-0.5 MM ² / AWG24
2.5	MS2520	2.5 MM. X 200 M	0.5-0.75 MM ² / AWG20 - AWG22
3.0	MS3020	3.0 MM. X 200 M	1.0 MM ² / AWG18
3.2	MS3220	3.2 MM. X 200 M	1.0-1.5 MM ² / AWG18 - AWG16
3.5	MS3520	3.5 MM. X 200 M	1.5 MM ² / AWG16
3.6	MS3620	3.6 MM. X 200 M	1.5 MM ² / AWG16
4.0	MS4020	4.0 MM. X 200 M	2.5 MM ² / AWG14
4.2	MS4220	4.2 MM. X 200 M	2.5 MM ² / AWG14
4.5	MS4520	4.5 MM. X 200 M	4.0 MM ² / AWG12
5.0	MS5020	5.0 MM. X 200 M	4.0-6.0 MM ² / AWG12-AWG10
5.5	MS5520	5.5 MM. X 200 M	6.0 MM ² / AWG10
6.0	MS6020	6.0 MM. X 200 M	10.0 MM ² / AWG8
6.5	MS6510	6.5 MM. X 100 M	10.0 MM ² / AWG8
7.0	MS7010	7.0 MM. X 100 M	16.0 MM ² / AWG6
8.0	MS8010	8.0 MM. X 100 M	16.0 MM ² / AWG6
10.0	MS1010	10.0 MM. X 100 M	25.0 MM ² / AWG4

**** Remark, Color : White, Red, Yellow, Green, Blue, Black, Grey and Transparent. Other colors and sizes available on request.**

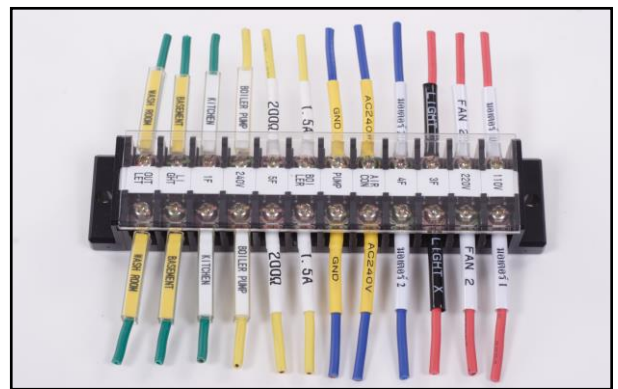

บริษัท สยามเทค อินเตอร์เทรด จำกัด

545/77 ถนนจรัญสนิทวงศ์ แขวงบางขุนศรี เขตบางกอกน้อย กรุงเทพมหานคร 10700

โทร 02-886-5730 แฟกซ์: 02-886-6737 www.siamtech-intertrade.com

โทร 089-780-6523 ติดต่อ คุณภาคภูมิ ทรัพย์ศิริสวัสดิ์ อีเมลล์ sales.siamtech@gmail.com, sales2@siamtech-intertrade.com

Part Name	Marker Tubes
Brand	Mark Series
Sizes available	2.0 mm, 2.5 mm, 3.0 mm, 3.2 mm, 3.5 mm, 3.6 mm, 4.0 mm, 4.2 mm, 4.5 mm, 5.0 mm, 5.5mm, 6.0 mm, 7.0 mm, 8.0 mm, 10.0 mm
Colour	White, Blue, Yellow, Red, Black & Green
Thickness	0.45 +/- 0.05 mm
Material	PVC (Polyvinyl Chloride)
Standard	Comply to ROHS
Withstand Temperature	95 – 105 °C
Tensile Strength At Yield	12.0 Mpa (Test Method: ASTM D 638)
Elongation At Yield	300 % (Test Method: ASTM D 638)
Hardness	80 +/- 5 shore A (Test Method: ASTM D2240-97)
Appearance	Visual Inspection – No abnormality
Flammability test	Comply to UL 94 V-1
Withstand voltage	5000 V (Test Method: JIS C 2410)